# Rapid Freeze High Ambient Air Cooled

# 60 hz Condensing Units

**COOL SOLUTIONS SINCE 1912** 

# **HOWE** Proven. Best Choice.

Howe's high ambient condensing units are sized and configured to match Howe Rapid Freeze ice flakers. These units are designed for unexcelled quality, reliability, and long life. They are durable, energy efficient and they provide a high degree of flexibility to a wide diversity of industrial applications.

### STANDARD FEATURES

- High efficiency Copeland semihermetic compressors with POE Oil.
- Electrical controls in weatherproof control box with compressor contactor and fused control circuit.
- Head pressure control system
- Suction & liquid vibration eliminators.
- Liquid line filter-drier and sight glass.
- Hail Guard included

#### SPECIAL FEATURES

- Pump down toggle switch
- Suction Accumulator
- Oil Separator with oil return line.
- Separate high pressure, low pressure control switches

Oversized condensing units rated for 110°F ambient conditions.

#### **OPTIONAL FEATURES**

 Coated condenser coils for harsh environments.




HA52-A-R404A-1 shown.



#### **APPLICATIONS**

- Produce Harvesters
- Produce Wholesalers
- Produce Markets
- Industrial Bakeries
- Seafood Processors
- Seafood Distributors
- Meat Processors
- Sausage Processors
- Poultry Processors
- Concrete Cooling
- Amusement Parks
- Industrial Catering

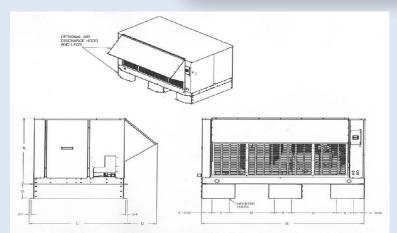

## **CONDENSING UNIT**

MODEL				CM A				CONNECTION SIZES SUCTION LIQUID		SHIPPING WEIGHT REC LBS KG CAP		
HA52-A-R4**A-*	45- 17/32	75-7/8	45-3/4	115.57	192.75	116.2	21/8	7/8	1185	538	76	

<sup>\*= 1</sup> for 230/3/60, 3 for 460/3/60, 4 for 575/3/60

## **ELECTRICAL R-404A**

VOLTAGE	MODEL	COMPRESSOI RLA	R LRA			N MOTORS FLA (EACH)	UNIT AMPS	MCA	МОР
208-230/3/60	HA52-A-R4**A-1	64.3	374	2	1560	3.6	71.5	93.6	150
460/3/60	HA52-A-R4**A-3	32.1	187	2	1560	1.7	35.5	46.3	70
575/3/60	HA52-A-R4**A-4	29.1	135	2	1560	1.4	34.1	39.2	60
Suction accumulator is provi	ded with Howe furnished cond	ensing unit.							



<sup>\*\*= 04</sup> for R404A, 48 for R448A